


For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

63PT Series Brass Inserts for Plastic Tubing

Use: For use in instrumentation, hydraulic, pneumatic systems, and with plastic tubing in potable water distribution systems. Not intended for use with non-plastic tubing.

Design Features:

- Available in a broad range of sizes and styles
- Fitting does not require any flaring, soldering, or other type of tubing preparation
-  No Lead

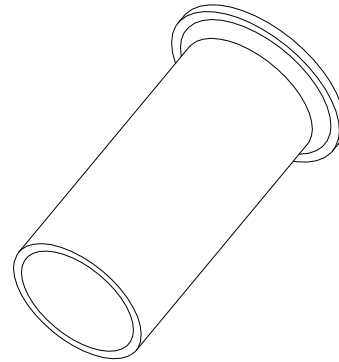

Operating Specifications:

Temperature: 40° - 180° F
Pressures: 125 PSI maximum


MATERIAL SPECIFICATIONS	
Insert	Brass

PART DIMENSIONS (Inches)		
Model	DIM. A	DIA. B
63PT-4X	.51	.17
63PT-5X	.63	.19
63PT-6X	.56	.25

PART DIMENSIONS (Inches)		
Model	DIM. A	DIA. B
63PT-8X	.72	.37
63PT-10X	.73	.48

Part Listing:

- 63PT-4X For 1/4" OD Tube
- 63PT-5X For 5/16" OD Tube
- 63PT-6X For 3/8" OD Tube
- 63PT-8X For 1/2" OD Tube
- 63PT-10X For 5/8" OD Tube

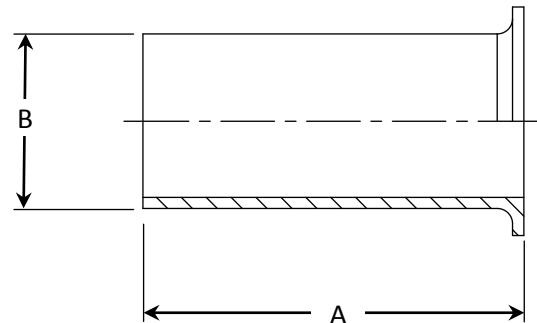

Listings & Certifications:

- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing-Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

