

Liberty Pumps®

NEW!

ProVore™

PDC-Series Duplex Controller



Models:

PDC-115

115V, for PRG101-Series pumps

PDC-230

230V, for PRG102-Series pumps

ProVore™ Duplex Control system monitors the operation of two ProVore™ grinder pumps

Available in 115V and 230V

Features:

- NEMA 1 indoor rated enclosure
- Automatically alternates pump operation – equalizing wear and extending pump life
- Plug-in ready wiring for easy and quick installation
- 10' and 25' cord length available
 - Factory wired floats with quick-disconnect at box
 - Green power indicator
 - Green pump run indicators
 - Audible and visual alarm
 - 9 volt alarm back-up
- Receptacles are angled to accept standard or right-angled plugs
- Programmed automatic 6 hour run limiter protects against run-dry or runaway pump conditions

innovate. evolve.

ProVore™

PDC-Series Duplex Controller



Technical Specifications

PDC panels control the operation of two ProVore™ residential grinder pumps. The system includes a primary pump control float and an alarm float. LED indicators show power on, pump run status, alarm status, and horn enable/disable status. Operator push-button controls are available to manually run the pumps, to manually test the alarm and to disable or enable the alarm horn, as well as reset the system. Both pumps are individually protected with a manual reset fuse to isolate a failed pump.

When incoming fluid activates the primary pump switch, the controller will energize one of the pumps. When water level in sump recedes, the pump will turn off when the primary pump switch drops to the off position. Upon the next pumping cycle, the controller

will activate the next pump in sequence from the one that ran previously, providing a pumping redundancy for the system. The controller will continue to alternate pumps on each cycle.

If a pump fails to operate, the alarm will activate and the second pump will be called on to operate.

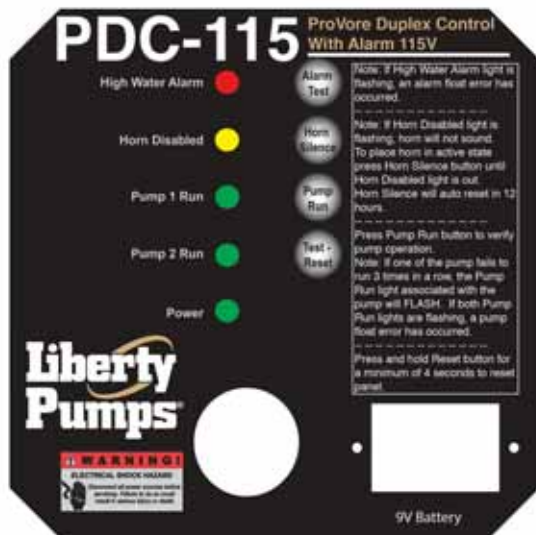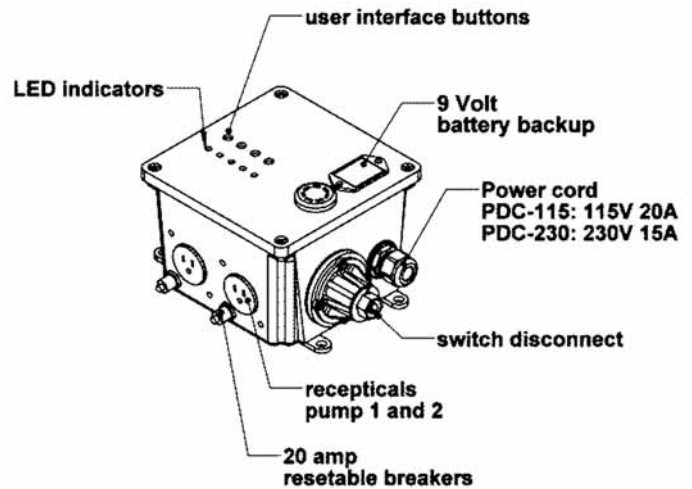

PDC-series controllers feature a programmed 6 hour run limiter for pump protection. If the alarm float remains closed (up position) for 6 hours but the primary float switch is open (down position) the alarm light will flash and the pump is turned off. This feature prevents the pump from running indefinitely and protects against run-dry situations.

Depth: 4.5"
 Width: 6" x 6"
 Weight: 6.5 lbs. (no floats)
 Breakers: 20 amp with re-set

MODEL	VOLTS	PHASE	Hz.	CORD LENGTH
PDC-115	115	1	60	10'
PDC-115-2	115	1	60	25'
PDC-230	230	1	60	10'
PDC-230-2	230	1	60	25'



Specifications subject to change without notice.