

FLOOR PENETRATING TUBE SLEEVE

550 series

Straight Floor Sleeve

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 550-FP tube support shall be used where necessary to support CTS flexible tube in piping systems. Tube support shall be zinc-plated, 18-gauge metal and shall be rust resistant.

INSTALLATION



Fastener shall be mounted to sub floor using all four holes provided. Flexible CTS tubing shall be inserted straight through support device to provide rigid support as tubing penetrates and exits the floor.

MATERIALS

18-ga. zinc-plated steel

DIMENSIONS

	550-FP2	550-FP2S
A: Plate width	3"	3"
B: Plate height	3"	3"
C: Nailways	2.5" O.C.	2.5" O.C.
D: Overall tube length	3.5"	2.3"
E: Tube length 1	1.75"	0.8"
F: Tube length 2	1.75"	1.5"
G: Tube inner diameter	0.63"	0.63"

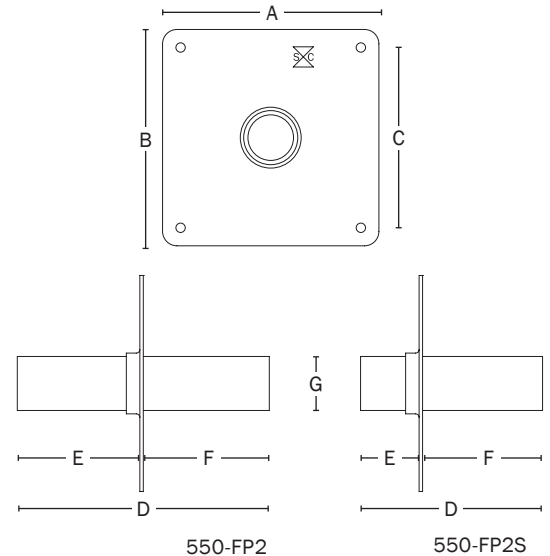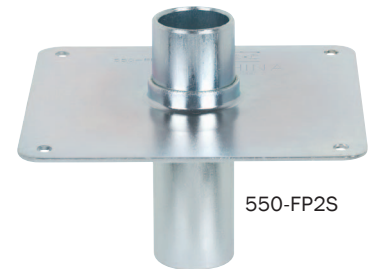

Create Item Number

550-FP_A

e.g. 550-FP2 = 1/2" CTS standard tube straight floor sleeve.

- A** CONFIGURATION
- 2 1/2" CTS Standard tube
 - 2S 1/2" CTS Short tube