



Submittal Data Information

Cartridge Style Pressure Reducing Valve

101-070

Effective: September 14, 2012

Supersedes: June 15, 2005

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	

Features

Automatic Pressure
Reset from Fast Fill

Easy External Dial-up
Pressure Setting

Set Pressure Indicator

Simple serviceability with the
unique one piece cartridge

Internal check allows the
cartridge to be replaced
without draining the system

Integral Strainer

ASSE 1003

Product Specifications

Max. Inlet Pressure..... 250 psi
Adjustment Range..... 10 – 50 psi
Max. Temp..... 210°F
Factory Setting..... 12 psi
Media..... Water

Materials of Construction

Body Forged Brass
Cartridge Wetted Parts
Stainless Steel,
Engineered Plastics,
Bronze, EPDM Seals

Purpose

The 3350 valve is used to automatically feed water to a hydronic system whenever pressure in the system drops below the pressure setting of the valve.


Operation

The cartridge style design ensures unsurpassed output pressure stability. A balance between diaphragm position and spring tension based on the desired outlet pressure is consistently maintained, even when inlet pressures fluctuate severely. The unique one-piece cartridge design significantly reduces diaphragm load, extending the overall product life. Unlike conventional PRV designs, the diaphragm does not double as a seal between the body and the cap. This allows for optimization of the

diaphragm for its intended use - maintaining pressure stability. A unique encapsulated shaft seal system prevents flowing media from contacting the diaphragm, greatly extending diaphragm life. If the diaphragm ever does fail, the encapsulated shaft and body seals work together to stop water from exiting the valve. Use of a stainless steel coaxial strainer prohibits system debris from affecting the valves' performance. An integral check valve allows the cartridge to be removed under system pressure for replacement or servicing.

Fast Fill

The 3350 provides an efficient and simple solution to filling your heating system. Simply push down the fast fill button on top of the PRV and when the set pressure is reached the valve pops out of fast fill and returns to its normal operating mode. This automatic reset feature of the fast fill on the 3350 eliminates the common problem of system over pressurization and prevents the relief valve from blowing off.

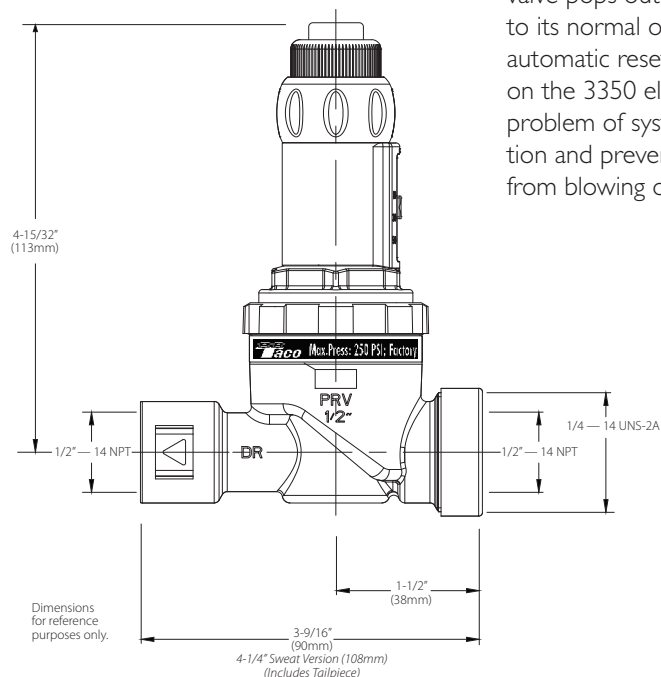

Do it Once. Do it Right.®

TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360
TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422
Visit our website at: www.taco-hvac.com

Printed in USA
Copyright 2012
TACO, Inc.

Fax: (905) 564-9436