

UF-5000

UNIVERSAL FLUSH

Application

- Installation in Drywall, Plaster, Masonry, Tile or any flush surface

Product Features

- Door panel has rounded safety corners providing an architecturally pleasing appearance
- One piece trim flange will not rack, sag or distortion
- Unique continuous concealed hinge will not bind

UF-5000 Access Door Specifications:

Material: Up to 16" X 16" - 16 gauge, 18 gauge mounting frame,
over 16" X 16" - 14 gauge door, 16 gauge mounting frame

Door: Flush to frame with rounded safety corners

Mounting Frame: One piece outer flange welded to mounting frame

Hinge: Continuous, concealed

Latch: Stainless Steel screwdriver operated cam latch


Optional Latches/Locks: Cylinder lock and key, allen head cam latch,
spanner head cam latch

Finish: Steel: 5-stage iron phosphate preparation with prime coat of
White alkyd baking enamel **OR** Stainless Steel: Type 304 - #4 satin polish

UF-5000 STANDARD SIZES

(other sizes available upon request)

| Nominal Door Size W&H | | Latches | Weight per Door | |
|-----------------------|-----------|---------|-----------------|------|
| Inches | mm | | lbs. | kg. |
| 6 X 6 | 152 X 152 | 1 | 2 | .9 |
| 8 X 8 | 203 X 203 | 1 | 2.7 | 1.2 |
| 8 X 12 | 203 X 305 | 1 | 3.6 | 1.6 |
| 10 X 10 | 254 X 254 | 1 | 3.6 | 1.6 |
| 12 X 12 | 305 X 305 | 1 | 4.7 | 2.1 |
| 12 X 16 | 305 X 406 | 2 | 6 | 2.7 |
| 12 X 18 | 305 X 457 | 2 | 7 | 3.1 |
| 12 X 24 | 305 X 610 | 2 | 8.5 | 3.9 |
| 14 X 14 | 355 X 355 | 1 | 6.2 | 2.7 |
| 16 X 16 | 406 X 406 | 2 | 7.6 | 3.4 |
| 16 X 24 | 406 X 610 | 2 | 12.5 | 5.7 |
| 18 X 18 | 457 X 457 | 2 | 11.2 | 5.1 |
| 18 X 24 | 457 X 610 | 2 | 15 | 6.7 |
| 22 X 22 | 560 X 560 | 4 | 16.3 | 7.2 |
| 22 X 30 | 560 X 762 | 5 | 21 | 9.5 |
| 22 X 36 | 560 X 914 | 5 | 26 | 12 |
| 24 X 24 | 610 X 610 | 4 | 18 | 8.2 |
| 24 X 30 | 610 X 762 | 5 | 22.5 | 10.2 |

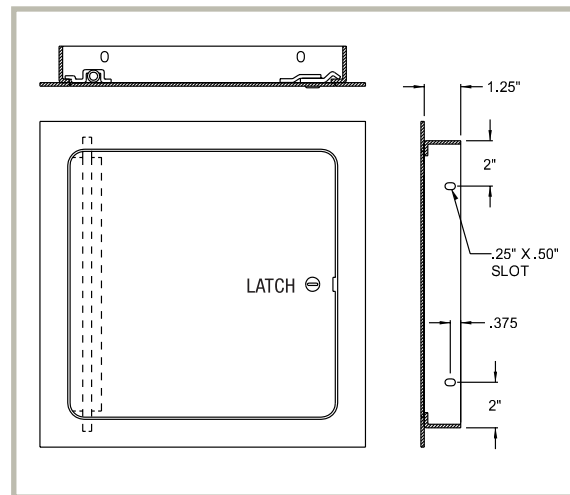

UF-5000 STANDARD SIZES

(other sizes available upon request)

| Nominal Door Size W&H | | Latches | Weight per Door | |
|-----------------------|------------|---------|-----------------|------|
| Inches | mm | | lbs. | kg. |
| 24 X 36 | 610 X 914 | 5 | 26.6 | 12.1 |
| 24 X 48 | 610 X 1220 | 5 | 38 | 18.1 |
| 30 X 30 | 762 X 762 | 5 | 27.5 | 12.5 |
| 36 X 36 | 914 X 914 | 5 | 39 | 17.7 |

Wall or ceiling opening is nominal door size + 3/8" (9 mm)
For detailed specifications see submittal sheet