

Viega® PEX Press Ball Valve - Zero Lead™*

Description

The Viega Zero Lead ball valve is equipped with a full port, Eco Brass® body. The ball valve also features Teflon® seals with EPDM and FKM stem seals.

ZERO LEAD™

Features



- Plated Brass Ball
- PTFE Seals
- Nickel Plated Brass Stem
- EPDM & FKM Stem Seals




Ratings

- Temperature Range: 0°F - 180°F
- Max. Operating Pressure: 160 psi

Approvals

-  - cCSAus
-  - UPC®
- NSF / ANSI 61-G
- NSF / ANSI 372
- ASTM F877

Component	Material
Body	Eco Brass
Ball	Plated Brass
Seat	PTFE
Stem	Nickel Plated Brass
Stem Seals	EPDM & FKM
Handle	Nickel Plated Zinc

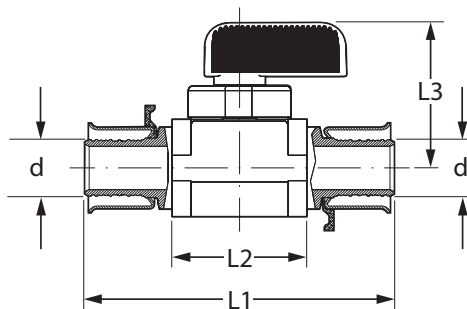

Viega PEX Press Ball Valve Zero Lead Brass P x P - Model 2842.2ZL

Part No	Size	L1 (in)	L2 (in)	L3 (in)
	d			
94500	3/8"	2.62	1.2	1.2
94521	1/2"	2.59	1.2	1.2
94541	3/4"	2.72	1.3	1.3

*Zero Lead identifies Viega® products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content).

This document subject to updates. For the most current Viega technical literature please visit www.viega.us.
Click Services -> Click Electronic Literature Downloads -> Select Product Line -> Select Desired Document

Viega LLC, 100 N. Broadway, 6th Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618