

Webstone

VALVE INNOVATION

BECAUSE **NO ONE** LIKES
TO GET **BURNED**

**THERMOSTATIC
MIXING VALVE**



THERMOSTATIC MIXING VALVE


- Heavy Duty Forged Brass Construction
- Output Range 95–131°F or 95–120°F
- Available w/ Integral Check Valves on inlets
- MIP, SWT, Compression, PEX, or Press Connections
- Sizes 3/8" – 1"
- Union connections on most models simplify installation and maintenance
- 95–131°F models feature a temperature locking handle to ensure appropriate output range
- Guaranteed for life

**AVAILABLE WITH
PRESS CONNECTIONS**


**PRO-CONNECT
PRESS**

- Compatible with popular press tools

AVAILABLE W/ INTEGRAL CHECK VALVES

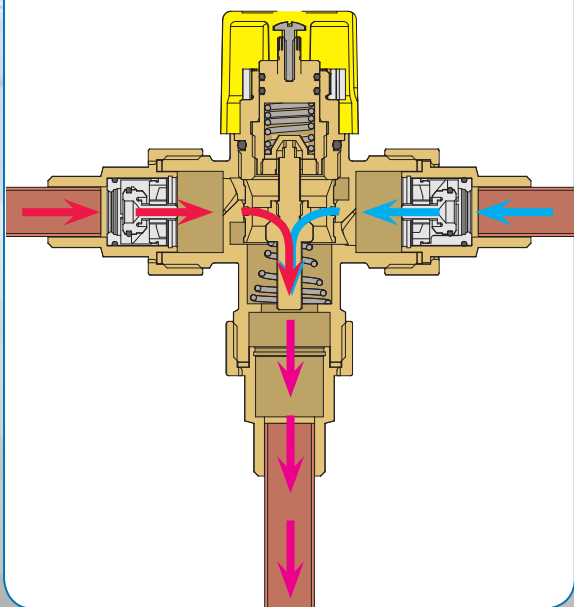

EASY TEMPERATURE LOCKING HANDLE

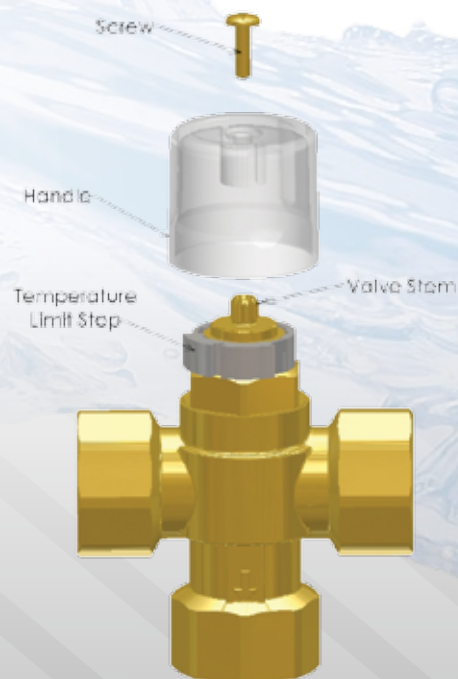


- 1 Remove screw and handle
- 2 Align Temperature Limit Stop
- 3 Replace handle and secure screw

APPLICATIONS


WATER DISTRIBUTION SYSTEMS

Install at water heater to set the maximum temperature for entire system

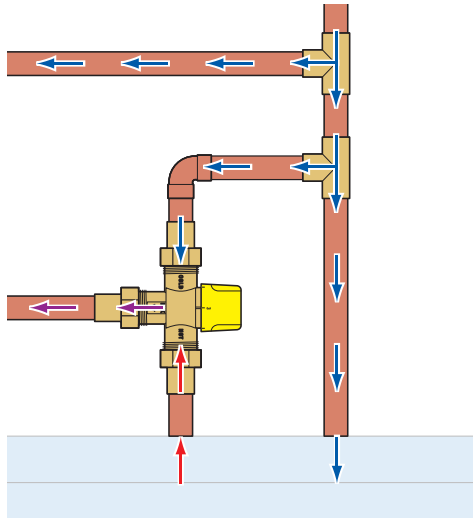


LOW TEMP HYDRONIC

Set the maximum temperature for radiant floor installations

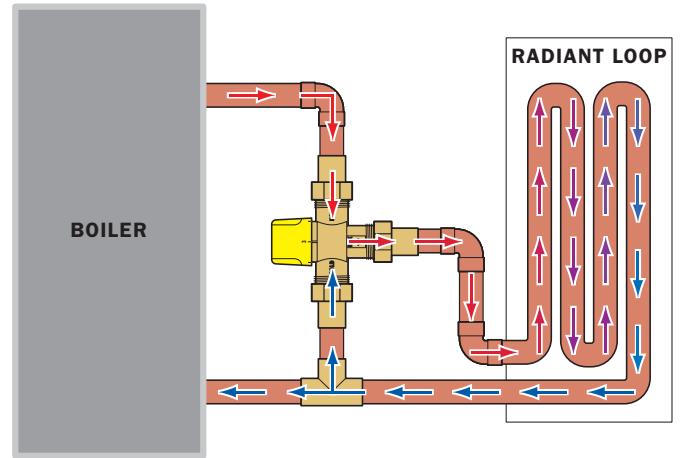


POINT OF USE - SINGLE FIXTURE

Set the maximum temperature of each fixture individually

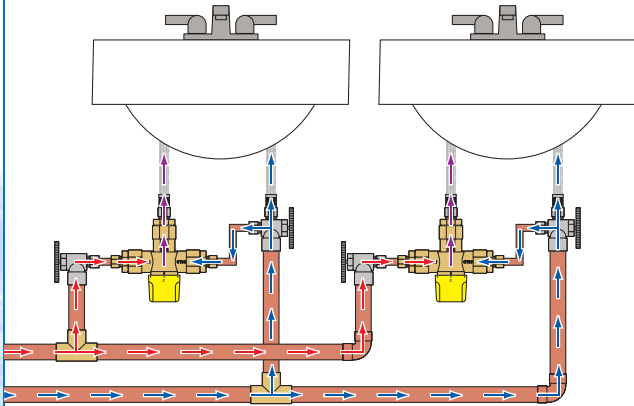

POINT OF USE - MULTI FIXTURE

Set the maximum temperature for a group of fixtures

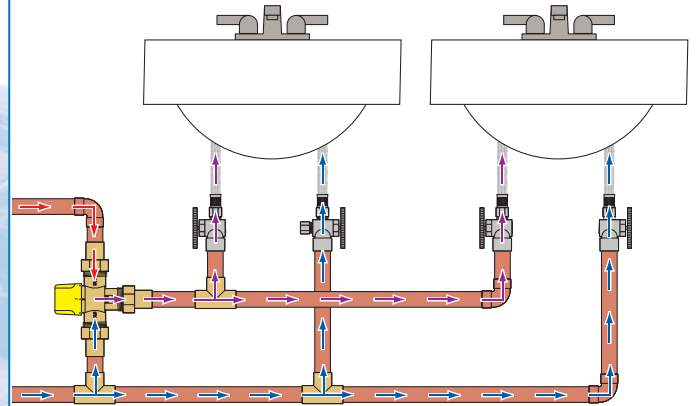

TEMPERATURE SETTINGS

Handle Marking	Output Temperature
1	95°F (35°C)
2	109°F (43°C)
3	119°F (48°C)
4	131°F (55°C)

UNION CONNECTIONS





**ASTM
F1807
PEX**



SOLUTIONS FOR APPLICATIONS

APPLICATION:	LOW-TEMPERATURE HYDRONIC		WATER DISTRIBUTION SYSTEMS				POINT OF USE SINGLE OR MULTI FIXTURE		POINT OF USE SINGLE ONLY
TEMPERATURE:	95-131°F (35-55°C)		95-131°F (35-55°C)		95-120°F (35-49°C)		95-131°F (35-55°C)	95-120°F (35-49°C)	95-131°F (35-55°C)
	NO CHECK	W/ CHECK	NO CHECK	W/ CHECK	NO CHECK	W/ CHECK	W/ CHECK	W/ CHECK	W/ CHECK
Compression	-	-	-	-	-	-	-	-	7440W
MIP	7410W	7420W	7410W	7420W	7410W-CAN	7420W-CAN	7420W	7420W-CAN	-
SWT	7510W	7520W	7510W	7520W	7510W-CAN	7520W-CAN	7520W	7520W-CAN	-
PEX	7310W	7320W	7310W	7320W	7310W-CAN	7320W-CAN	-	-	-
Press	7810W	7820W	7810W	7820W	7810W-CAN	7820W-CAN	-	-	-

THERMOSTATIC MIXING VALVE Lead-Free

150 PSI

SIZE	OUTLET TEMPERATURE RANGE 95-131°F			OUTLET TEMPERATURE RANGE 95-120°F		
	ITEM #	CTN/CASE	WT/CASE	ITEM #	CTN/CASE	WT/CASE
MIP						
1/2"	74102W	1/10	18	74102W-CAN	1/10	18
3/4"	74103W	1/10	18	74103W-CAN	1/10	18
1"	74104W	1/10	21	74104W-CAN	1/10	21
SWT						
1/2"	75102W	1/10	18	75102W-CAN	1/10	18
3/4"	75103W	1/10	18	75103W-CAN	1/10	18
1"	75104W	1/10	21	75104W-CAN	1/10	19
ASTM F1807 PEX						
1/2"	73102W	1/10	17	73102W-CAN	1/10	14
3/4"	73103W	1/10	18	73103W-CAN	1/10	14
Press						
1/2"	78102W	1/10	18	78102W-CAN	1/10	18
3/4"	78103W	1/10	20	78103W-CAN	1/10	20
1"	78104W	1/10	21	78104W-CAN	1/10	20

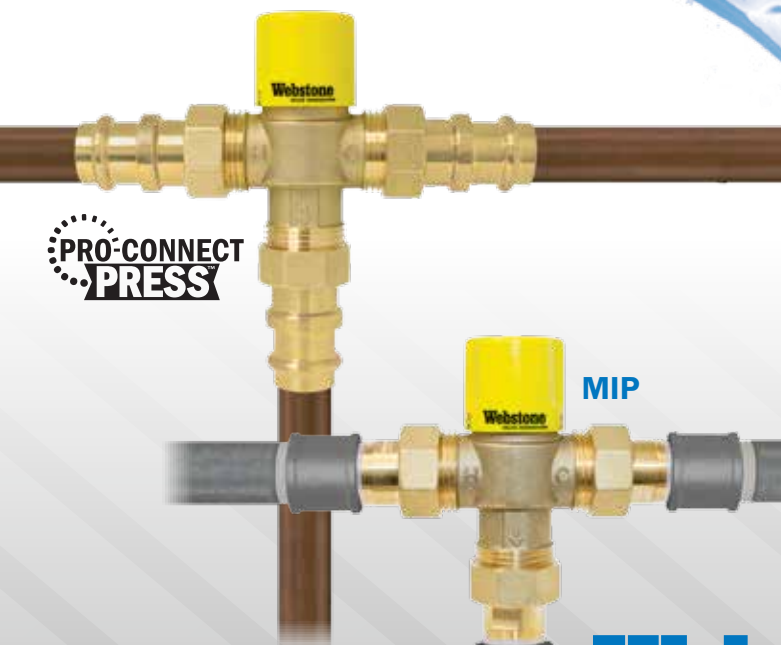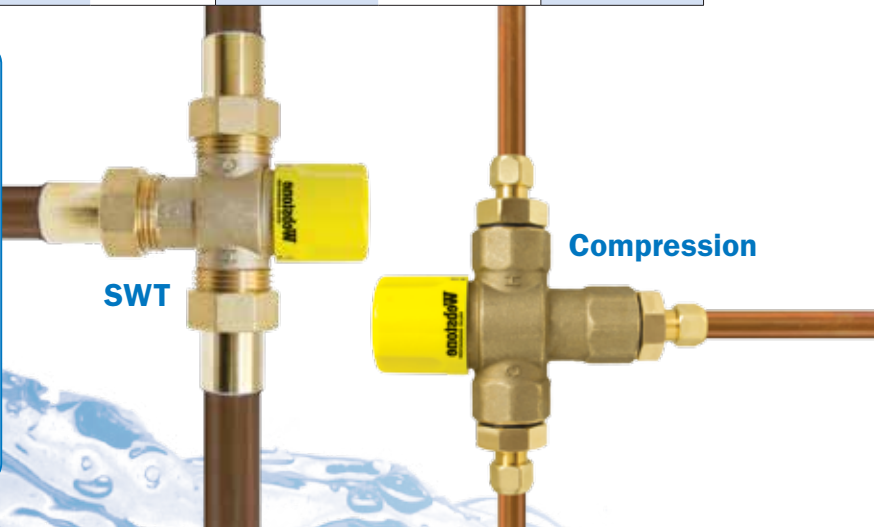

**PRO-CONNECT
PRESS**

THERMOSTATIC MIXING VALVE W/ INTEGRAL CHECK VALVE Lead-Free

150 PSI

SIZE	OUTLET TEMPERATURE RANGE 95-131°F			OUTLET TEMPERATURE RANGE 95-120°F		
	ITEM #	CTN/CASE	WT/CASE	ITEM #	CTN/CASE	WT/CASE
Compression						
3/8"	74401W	1/10	16	-	-	-
MIP						
1/2"	74202W	1/10	18	74202W-CAN	1/10	18
3/4"	74203W	1/10	18	74203W-CAN	1/10	18
1"	74204W	1/10	22	74204W-CAN	1/10	21
SWT						
1/2"	75202W	1/10	16	75202W-CAN	1/10	18
3/4"	75203W	1/10	18	75203W-CAN	1/10	18
1"	75204W	1/10	21	75204W-CAN	1/10	19
ASTM F1807 PEX						
1/2"	73202W	1/10	17	73202W-CAN	1/10	14
3/4"	73203W	1/10	17	73203W-CAN	1/10	14
Press						
1/2"	78202W	1/10	19	78202W-CAN	1/10	18
3/4"	78203W	1/10	20	78203W-CAN	1/10	20
1"	78204W	1/10	21	78204W-CAN	1/10	21

Webstone
VALVE INNOVATION

ONE APPIAN WAY WORCESTER, MA 01610
P.O. BOX 59 WORCESTER, MA 01613
P: (800) 225-9529 • F: (800) 336-5133
WWW.WEBSTONEVALVES.COM

This content has been provided for the express purpose of demonstrating a product's function in a system and should not be used as a reference for designing or assembling any working installation. The user is solely responsible for ensuring that all products are used and all systems are designed in accordance with all applicable federal, state and local codes.

The Isolator® is a trademark of Webstone © 2016 Webstone, a brand of NIBCO FORM: TMV-1116