


Spirocombi Air & Dirt Separator with Magnet

Job Name:
Engineer:
Contractor:
Representative:

Tag	Model	Flow	Size	Location

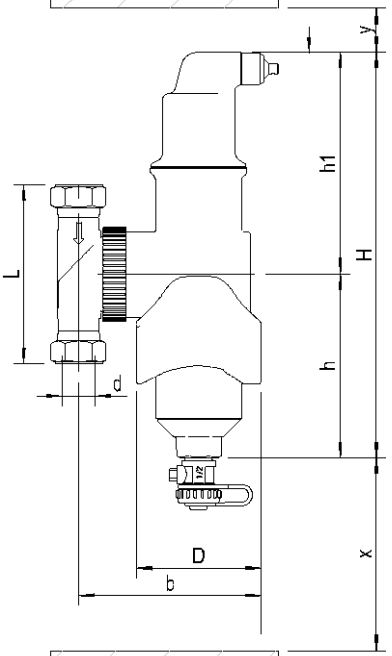

Specifications:

Shell	Brass
Vent Head	Brass
Float	Non-Ferrous
Seal	Viton
O Ring	Viton/EPDM
Coalescing Medium	Copper
Magnet	Neodymium
Max. Working Pressure	150 psig
Max. Operating Temperature	270°F

Notes:

d (Pipe Size)	3/4"	1"	1 1/4"	1 1/2"	2"
H (inches)	10.7	10.7	16	16	16
h1 (inches)	5.9	5.9	9.1	9.1	9.1
D (inches)	3.3	3.3	3.3	3.3	3.3
b (inches)	4.9	5.1	5.4	5.6	5.8
L (NPT) (inches)	3.9	3.9	5.0	5.0	5.0
(Sweat) (inches)	3.9	3.9	6.1	6.1	6.1
(Pressfit) (inches)	6.5	6.7	8.3	8.3	9.3
Weight (lbs)	6	6.5	11.5	11.5	12.5
X (inches)	4	4	4	4	4
Y (inches)	1	1	1	1	1
Rec. Flow (gpm)	6	10	15	30	40
Model (NPT)	VDR075FTM	VDR100FTM	VDR125FTM	VDR150FTM	VDR200FTM
(Sweat)	VDR075SWM	VDR100SWM	VDR125SWM	VDR150SWM	VDR200SWM
(Pressfit)	VDR075PFM	VDR100PFM	VDR125PFM	VDR150PFM	VDR200PFM

(dimensions for reference only)